



# CD-140

## COMPRESSION DRIVER

<b>1" / 25.4 mm</b> CHASSIS DIAMETER	<b>40 W (A.E.S.)</b> AES POWER HANDLING	<b>2 kHz - 18 kHz</b> FREQUENCY RESPONSE	<b>1.75" / 44 mm</b> ALUMINIUM VOICE COIL	<b>105 dB dB</b> SENSITIVITY (1W/ 1m)
---	--	---	--	--


- 1" Exit ferrite magnet compression driver.
- 1.75" / 43mm Copper clad aluminium voice coil.
- Titanium diaphragm with double sinusoidal roll surround (titanium).
- 40 Wrms (AES standard).
- Copper inductance ring for extended response.
- Ferrofluid cooled.
- Self aligning diaphragm for easy field replacement.

The CD140 is an excellent choice for professionals who are looking to achieve high sound pressure level performance and clarity of sound from compact dimension. The compression driver exit diameter is an industry standard 1 inch (25.4mm).


The CD140 combines high BL and a lightweight diaphragm assembly to produce a very high output device that also features extended bandwidth and well defined frequency response. The CD140 is optimised for high performance system designs. The driver has a rated low frequency response limit of 2 kHz and features extended response to 18 kHz.

The throat diameter and fixings are industry standard and will match to commercially available high frequency horns. The ferrite based permanent magnetic system produces a very high efficiency to weight and size ratio. This makes the CD140 ideal for high level professional touring applications as well as high level fixed installation.

### FREQUENCY RESPONSE DATA\*

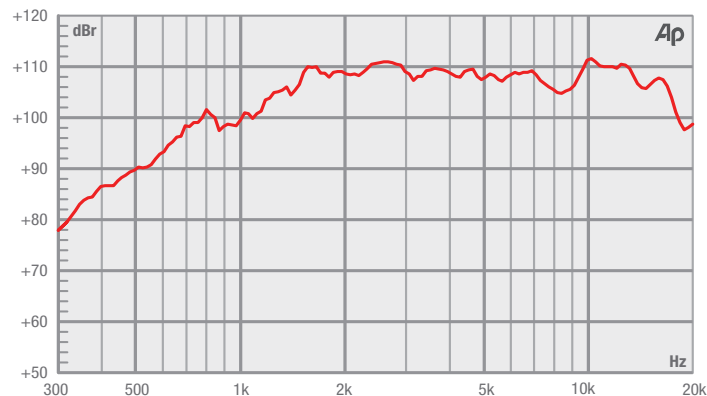

### IMPEDANCE

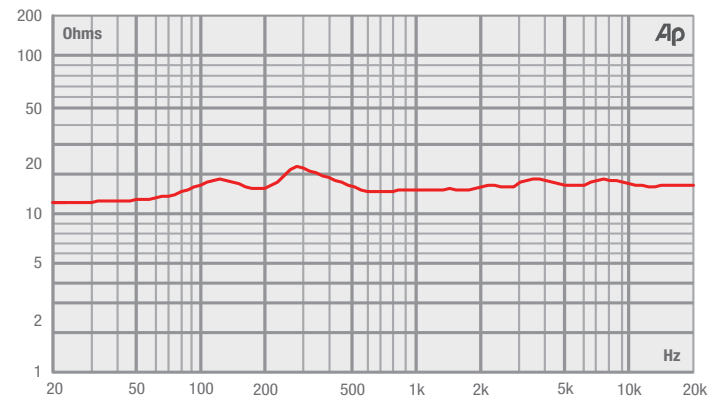

### ELECTRO ACOUSTIC SPECIFICATIONS

Sound Channel / Throat Size	1" / 25.4 mm
Impedance	8 Ω / 16 Ω
Power Handling	40 w (A.E.S.)
Sensitivity (1 w - 1 m)	105 dB
Usable Frequency Range -6dB	2 kHz - 18 kHz
Recommended X-over frequency filtered at 18dB/Octave	3.5 kHz
Effective Diaphragm Diameter	1.75" / 44 mm
Voice Coil Diameter	1.75" / 44 mm
Voice Coil DC Resistance	6.2 / 10.5 Ω
Max Diaphragm Displacement	0.016" / 0.4 mm
Flux Density	1.35 Tesla
Magnet Weight	16 oz

### MOUNTING / SHIPPING INFORMATION

Overall Diameter	4" / 102 mm
Depth	1.97" / 51 mm
Weight	3.4 lb / 1.54 kg
Shipping Weight	3.6 lb / 1.64 kg
Bolt Fixing Hole Dimensions and Quantity	3x M6 on 57.15 mm PCD / 2x M6 on 76.2 mm PCD
Packing Carton Dimensions	(W) 120 (D) 120 (H) 160 mm

### MATERIALS OF CONSTRUCTION

Former Material	Polyamide
Voice Coil Material	Aluminium
Diaphragm Material	Titanium
Surround / Edge Termination	Double Sinusoidal Roll Titanium
Magnet Material	Ferrite
Connectors	6.3 mm Spade
Polarity	Positive voltage at red/ positive terminal causes positive pressure at throat exit

\* Please enquire about alternative impedances.  
\* Frequency response measurement taken on axis with 1w signal at distance of 1m using custom horn with 80°x 60° coverage.